Needle roller bearing
RNA4900-U-IKO - RNA4900-U-IKO

https://www.123bearing.eu/bearing-housing/needle-roller-bearing/needle/rna4900-u-iko

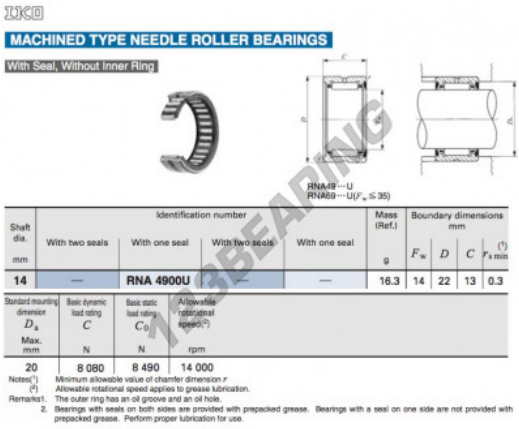

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring

RNA49···U
RNA69···U(F_w ≤ 35)

Shaft dia. mm	Identification number: With two seals	With one seal	With two seals	With one seal	Mass (Ref.) g	Boundary dimensions mm: F_w	D	C	$r_{s\,min}$ (1)
14	—	RNA 4900U	—	—	16.3	14	22	13	0.3

Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (2) rpm
20	8 080	8 490	14 000

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952378787
Inside diameter	14 mm
Outside diameter	22 mm
Thickness	13 mm
Packaging	1

contact@123bearing.eu
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE