


Needle roller bearing NAF659530-IKO - NAF659530-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/needle/naf659530-iko>

IKO
NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE
With Inner Ring

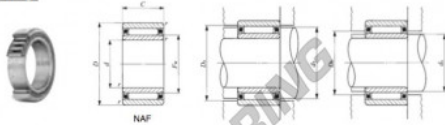

| Shaft dia. mm | Identification number | Mass (Ref.) g | Boundary dimensions mm | | | | | Standard mounting dimensions mm | | | | |
|----------------------------------|-----------------------|-----------------------------------|------------------------|---|-----|--------------------------|-------|---------------------------------|---------------|---------------|---------------|----|
| | | | d | D | C | r_s min ⁽¹⁾ | F_w | d_b | D_s Max. | d_4 Min. | D_b Max. | |
| 65 | NAF 659530 | 790 | 65 | 95 | 30 | 1.5 | 75 | 82 | 87 | 73 | 73.5 | 76 |
| Basic dynamic load rating C | | Basic static load rating C_0 | | Allowable rotational speed ⁽²⁾ | | Assembled roller ring | | | | | | |
| N | | N | | rpm | | LRT 657530 | | | | | | |
| 63 100 | | 144 000 | | 6 500 | | | | | | | | |

Notes:
(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark:
1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952384832 |
| Inside diameter | 65 mm |
| Outside diameter | 95 mm |
| Thickness | 30 mm |
| Weight | 790 g |
| Packaging | 1 |

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE