


GE Rod end
GE260GS-2RS-IKO - GE260GS-2RS-IKO
<https://www.123bearing.eu/bearing-housing/rod-end/ge/ge260gs-2rs-iko>

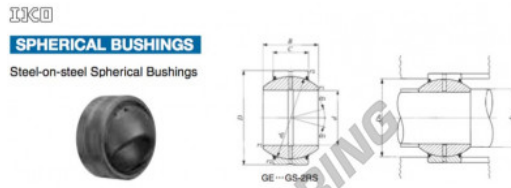

Shaft dia. mm	Identification number		Mass (ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		d	D	B	C	d _s	r ₁ ⁽¹⁾ r _{1s} min	r ₂ ⁽¹⁾ r _{2s} min	α	α ₁
260		GE 260GS-2RS	81,8	260	400	205	120	350	1,1	1,1	15	14
Mounting dimensions mm		Dynamic load capacity C _d		Static load capacity C _s								
d _s		D _s		N		N						
Min.	Max. ⁽²⁾	Max.	Min.	N		N						
267	283,5	393	345	4 120 000		24 700 000						

Notes⁽¹⁾ Minimum allowable value of chamfer dimensions r₁ and r₂.
⁽²⁾ When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s.
 Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
 2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952392684
Inside diameter	260 mm
Outside diameter	400 mm
Thickness	205 mm
Type	GE
Lubrication	without
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE