


GE Rod end SBB56-2RS-IKO - SBB56-2RS-IKO

<https://www.123bearing.eu/bearing-housing/rod-end/ge/sbb56-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

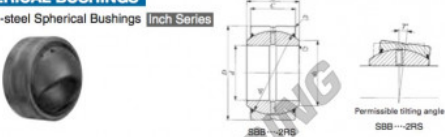

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
88.900 (3 1/2)		SBB 56-2RS	4.83	88.900 (3 1/2)	139.700 (5 1/2)	77.77 (3.062)	66.68 (2.625)
Radial internal clearance mm	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N			
	d _k	d ₁ r ₁ max. r ₂ max.					
128(5.039)	0.13 / 0.23	101.6 0.6 0.8	837 000	5 020 000			

Notes: (1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952392974
Inside diameter	88.9 mm
Inside diameter	3 1/2" inch
Outside diameter	139.7 mm
Outside diameter	5 1/2" inch
Thickness	77.77 mm
Thickness	3.062" inch
Type	GE
Lubrication	without
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE