


Cam follower CF24-VR-IKO - CF24-VR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf24-vr-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Screwdriver Slot

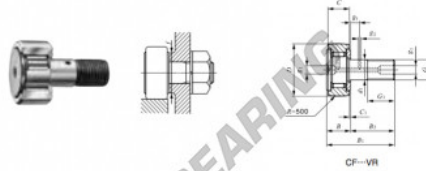

Stud dia. mm	Identification number								Mass (Ref.)					
	Shield type				Sealed type				g	D	C	d ₁		
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	820	62	29	24		
24	CF 24	VR												
Boundary dimensions mm														
G	G ₁	B _{max}	B _{1max}	B ₂	B ₃	C ₁	g ₁	g ₂	f ⁽¹⁾ mm	Mounting diameter f _{min} mm	Maximum tightening torque C N·m	Ball static load rating C ₀ N	Maximum allowable static load N	
M24×1.5	25	30.6	80.1	49.5	11	0.8	8	4	1	40	215	48 600	92 000	52 000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952440637
Inside diameter	24 mm
Outside diameter	62 mm
Thickness	29 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE