


Cam follower CF10-1-RM-IKO - CF10-1-RM-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf10-1-rm-iko>

IKO

CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

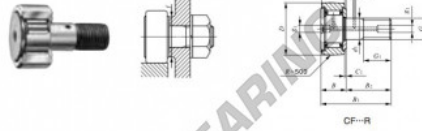

Stud dia. mm	Identification number				Maxs (Ref.)					
	Shield type		Sealed type		g	D	C	d ₁	G	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
10	CF 10-1 RM				1	60	26	12	10	M10×1

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum lightening torque N·m	Ball dynamic load rating C	Ball static load rating C ₀	Maximum allowable static load N
G ₁	B	B ₁	B ₂	B ₃	C ₁	G ₁	G ₂	r _{max}	(°)					
12	13.2max	36.2max	23	—	0.6	*4	—	0.3	16	14.7	5 430	6 890	6 890	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441207
Inside diameter	10 mm
Outside diameter	26 mm
Thickness	12 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE