


Cam follower CF24-R-IKO - CF24-R-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf24-r-iko>



CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

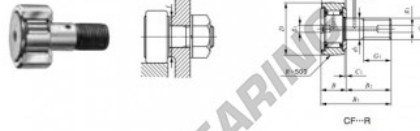

Stud dia. mm	Identification number				Maxs (Ref.)				
	Shield type		Sealed type		ϕ	D	C	d_1	G
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
24	CF 24	R			815	62	29	24	M24×1.5

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum lightening torque N·m	Ball dynamic load rating C N	Ball static load rating C ₀ N	Maximum allowable static load N
G ₁	B	B ₁	B ₂	B ₃	C ₁	G ₁	G ₂	r _{max}	(°)					
25	30.6max	80.1max	49.5	11	0.8	8	4	1	40	215	30 500	52 600	52 000	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441481
Inside diameter	24 mm
Outside diameter	62 mm
Thickness	29 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE