


## Cam follower CF24-1-R-IKO - CF24-1-R-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf24-1-r-iko>



### CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

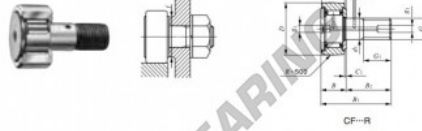

Stud dia. mm	Identification number				Max (Ref.)				
	Shield type		Sealed type		g	D	C	d <sub>1</sub>	G
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
24	CF 24-1	R			1 140	72	29	24	M24 x 1.5

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Ball dynamic load rating C N	Ball static load rating C <sub>0</sub> N	Maximum allowable static load N
G <sub>1</sub>	B	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>	r <sub>s</sub> max	(°)					
25	30.6max	80.1max	49.5	11	0.8	8	4	1	40	215	30 500	52 600	52 000	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441528
Inside diameter	24 mm
Outside diameter	72 mm
Thickness	29 mm
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE