


Cam follower CFES10-1-B-IKO - CFES10-1-B-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfes10-1-b-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers | With Cage/With Hexagon Hole

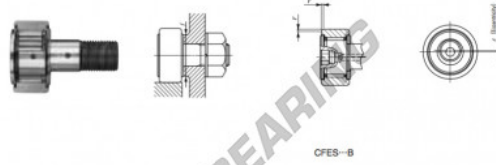

CFES-B

Stud dia. mm	Identification number				Mass (Ref.) g	D	C	d ₁								
	Shield type		Sealed type													
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring												
10	CFES 10-1 B				60	26	12	10								
Boundary dimensions mm																
G	G ₁	B max	B ₁ max	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε ^(°)	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M10×1.25	12	13.2	36.2	23	—	0.6	—	—	4	0.3	0.3	16	13.8	5 430	6 890	6 890

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443492
Inside diameter	10 mm
Outside diameter	26 mm
Thickness	12 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE