


Cam follower CFES12-1-B-IKO - CFES12-1-B-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfes12-1-b-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers | With Cage/With Hexagon Hole

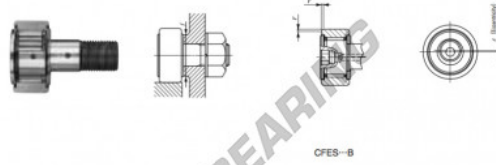

CFES-B

Stud dia. mm	Identification number								Mass (Ref.) g	D	C	d ₁				
	Shield type				Sealed type											
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring									
12	CFES 12-1 B								105	32	14	12				
Boundary dimensions mm																
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε _{max}	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	6	0.6	0.4	21	21.9	7 910	9 790	9 790

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443584
Inside diameter	12 mm
Outside diameter	32 mm
Thickness	14 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE