


Cam follower CFE24-1-IKO - CFE24-1-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfe24-1-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers With Cage/With Screwdriver Slot

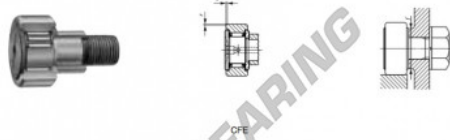

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d ₂
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
33	CFE 24-1						1 220	72	29	33

Boundary dimensions mm															
G	B ₃	B ₁ max	B ₁ min	B ₂	C ₁	g ₁	G ₁	(1) r _{max}	Mounting dimension f Min, mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N		
M24×1.5	25.5	30.6	30.6	80.1	49.5	0.8	8	24	1	0.8	40	215	30 500	52 600	52 000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460158
Inside diameter	33 mm
Outside diameter	72 mm
Thickness	29 mm
Weight	1220 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE