


Cam follower CFE6-VBR-IKO - CFE6-VBR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfe6-vbr-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

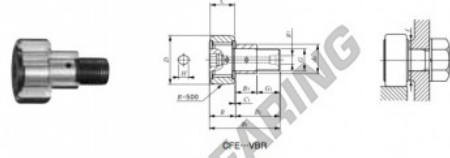

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
9	CFE	6	VBR				21	16	11	9

Boundary dimensions mm										
G	B ₃	B _{max}	B _{1max}	B ₂	C ₁	G ₁	H	H _{max}	f	g
M 6×1	7.5	12.2	28.2	16	0.6	—	8.5	3	0.3	0.4

Mounting dimension	Maximum splining torque	Basic dynamic load rating	Basic static load rating	Maximum allowable static load
f	N·m	C	C ₀	N
11	2.7	6 980	8 500	1 950

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460295
Inside diameter	9 mm
Outside diameter	16 mm
Thickness	11 mm
Weight	21 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE