


Cam follower CFE12-VUU-IKO - CFE12-VUU-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfe12-vuu-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

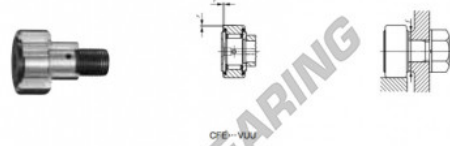

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.) g	D	C	d _e
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
16				CFE 12 VUU	107	30	14	16

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ ⁽¹⁾ _{min}	Eccentricity E	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M12 × 1.5	11.5	15.2	40.2	25	0.6	6	13.5	0.6	0.8	21	21.9	13 500	19 700	13 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461049
Inside diameter	16 mm
Outside diameter	30 mm
Thickness	14 mm
Weight	107 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE