


Cam follower CFE30-1-VUU-IKO - CFE30-1-VUU-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfe30-1-vuu-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

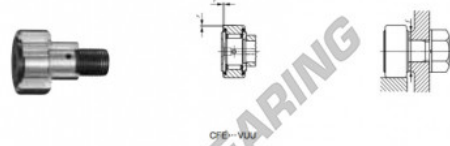

CFE30-1-VUU

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.) g	D	C	d _e
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
41				CFE 30-1 VUU	2 190	85	35	41

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ _{min}	Eccentricity E	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M30 × 1.5	32.5	37	100	63	1	8	30.5	1	1.5	49	438	67 700	144 000	85 900

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461377
Inside diameter	41 mm
Outside diameter	85 mm
Thickness	35 mm
Weight	2190 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE