


## Cam follower CF12-1-WBR-IKO - CF12-1-WBR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf12-1-wbr-iko>

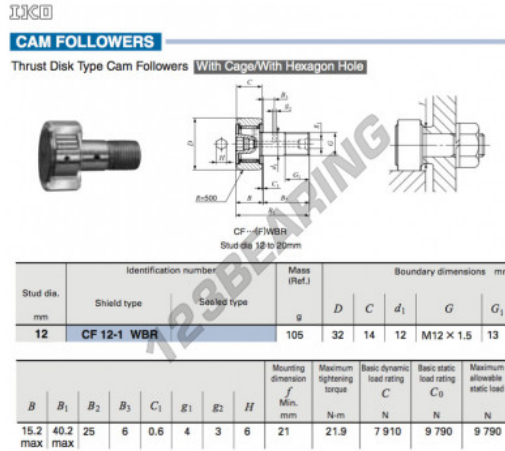

Stud dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm				
	Shield type	Sealed type		D	C	d <sub>1</sub>	G	G <sub>1</sub>
12	CF 12-1	WBR	105	32	14	12	M12 X 1.5	13

								Mounting dimension f mm	Maximum tightening torque N.m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
B	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	H	Min.				
15.2 max	40.2 max	25	6	0.6	4	3	6	21	21.9	7 910	9 790	9 790

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461513
Inside diameter	12 mm
Outside diameter	32 mm
Thickness	14 mm
Weight	105 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE