


Cam follower CFE30-2-VBUUR-IKO - CFE30-2-VBUUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfe30-2-vbuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

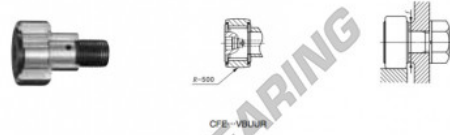

Outside diameter of eccentric collar mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
41	CFE 30-2 VBUUR						2 380	90	35	41

Boundary dimensions mm											
G	B ₃	B ₁ max	B ₂ max	C ₁	G ₁	H	f _{max}	f _{min}	Mounting dimension f mm	Maximum splining torque N·m	
M30×1.5	32.5	37	100	63	1	8	30.5	17	1.5	49	438

Basic dynamic load rating		Basic static load rating		Maximum allowable static load	
C	C ₀	N	N	N	N
67 700	144 000	85 900			

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461957
Inside diameter	41 mm
Outside diameter	90 mm
Thickness	35 mm
Weight	2380 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE