


## Cam follower CR16-BUUR-IKO - CR16-BUUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr16-buur-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Hexagon Hole

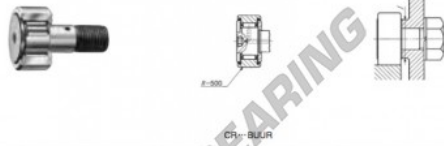

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>	
	Shield type		Sealed type								
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring							
11.112 ( $\frac{3}{8}$ )	CR 16 BUUR				73	25.400 (1)	15.875 (1/2)	11.112 (3/8)	1/2-20	12.700 (1/2)	
Boundary dimensions mm/inch											
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	H	r	Bearing dimension f Mm/ mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N
17.3 (3/8)	25.400 (1)	8.350 (1/2)	0.794 (1/8)	4.782 (3/8)	3.175 (1/4)	6.350 (1/4)	1.191 (1/8)	17.859 (3/4)	17.4	8 910	10 800

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462497
Inside diameter	11.112 mm
Outside diameter	25.4 mm
Thickness	15.875 mm
Weight	73 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE