


## Cam follower CR26-BUUR-IKO - CR26-BUUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr26-buur-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Hexagon Hole

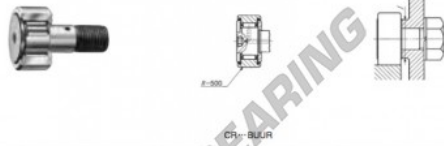

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>	
	Shield type		Sealed type								
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring							
15.875 ( $\frac{5}{8}$ )	CR 26 BUUR				260	41.275 ( $\frac{1}{2}$ )	22.225 ( $\frac{1}{2}$ )	15.875 ( $\frac{5}{8}$ )	$\frac{1}{4}$ -18	19.050 ( $\frac{3}{4}$ )	
Boundary dimensions mm/inch											
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	H	r	Bearing dimension f Mm/ mm(inch)	Maximum spinning torque C N·m	Basic static load rating C <sub>0</sub> N	Basic dynamic load rating C N
23.8 (0.93)	26.100 ( $\frac{1}{2}$ )	9.525 ( $\frac{3}{8}$ )	0.794 ( $\frac{1}{16}$ )	4.702 ( $\frac{3}{16}$ )	3.969 ( $\frac{1}{8}$ )	7.938 ( $\frac{1}{4}$ )	1.588 ( $\frac{1}{16}$ )	26.196 ( $\frac{1}{2}$ )	55.7	19.600	24.300

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462633
Inside diameter	15.875 mm
Outside diameter	41.275 mm
Thickness	22.225 mm
Weight	260 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE