


Cam follower CR30-BUUR-IKO - CR30-BUUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr30-buur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Hexagon Hole

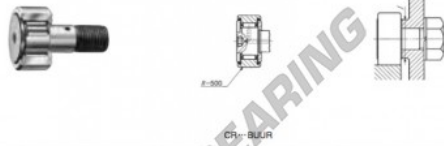

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type		Sealed type							
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring						
19.050 (3/4)	CR 30		BUUR		410	47.625 (1 7/8)	25.400 (1)	19.050 (3/4)	7/16	22.225 (7/8)

Boundary dimensions mm/inch										Bearing dimension f Mm/ mm(inch)	Maximum tightening torque C	Basic dynamic load rating C ₁₀	Basic static load rating C ₀
B	B ₂	B ₃	C ₁	E ₁	E ₂	H	r	N	N				
25.8126	44.650 (1 3/4)	11.112 (3/4)	0.794 (1/8)	4.792 (3/4)	3.969 (3/8)	7.938 (3/4)	1.988 (3/8)	32.543 (1 1/8)	100	25 100	38 200		

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462695
Inside diameter	19.05 mm
Outside diameter	47.625 mm
Thickness	25.4 mm
Weight	410 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE