


Cam follower CR18-UUR-IKO - CR18-UUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr18-uur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

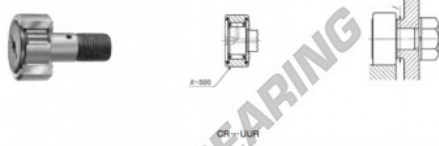

Stud dia. mm (inch)	Identification number				g	Mass (Ref.)				
	Shield type		Sealed type			D	C	d ₁	G _{UNF}	G ₁
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring						
11.112 ($\frac{7}{16}$)			CR 18	UUR	88	28.575 $\frac{1}{2}$	15.875 $\frac{1}{2}$	11.112 $\frac{1}{2}$	$\frac{1}{8}$ -20	12.700 $\frac{1}{2}$
Boundary dimensions mm(inch)										
B _{max}	B ₂	B ₃	C ₁	S ₁	S ₂	r	Bearing dimension f Min. mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C ₀ N	Basic static load rating C ₀ N
17.3 0.68	25.400 1	6.350 $\frac{1}{4}$	0.794 $\frac{1}{32}$	4.762 $\frac{3}{16}$	3.175 $\frac{1}{8}$	1.588 $\frac{1}{16}$	19.050 $\frac{3}{4}$	17.4	9 190	11 600

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462961
Inside diameter	11.112 mm
Inside diameter	7/16" inch
Outside diameter	28.575 mm
Outside diameter	1 1/8" inch
Thickness	15.875 mm
Thickness	5/8" inch
Weight	88 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE