


Cam follower CR28-R-IKO - CR28-R-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr28-r-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

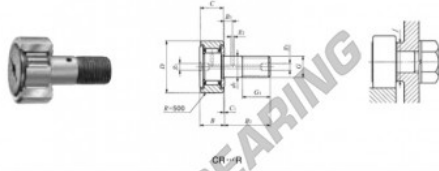

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type		Sealed type							
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring						
19.050 ($\frac{3}{4}$)	CR 28 R				365	44.450 ($1\frac{1}{2}$)	25.400 (1)	19.050 ($\frac{3}{4}$)	7_1-18	22.225 ($\frac{7}{8}$)
Boundary dimensions mm(inch)										
B max	B ₂	B ₃	C ₁	S ₁	S ₂	r	Bearing dimension f Min. mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C ₀ N	Basic static load rating C ₀ N
25.8125	44.450 ($1\frac{1}{2}$)	11.112 ($\frac{3}{8}$)	0.794 ($\frac{1}{16}$)	4.762 ($\frac{3}{16}$)	3.969 ($\frac{5}{32}$)	1.588 ($\frac{1}{16}$)	22.543 ($\frac{9}{16}$)	100	25 100	38 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463029
Inside diameter	19.05 mm
Outside diameter	44.45 mm
Thickness	25.4 mm
Weight	365 g
Packaging	-

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE