


Cam follower CR32-R-IKO - CR32-R-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr32-r-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

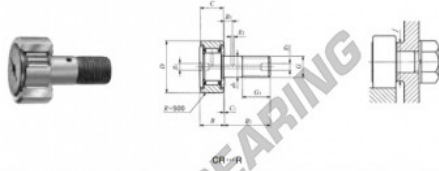

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring						
22.225 ($\frac{7}{8}$)	CR 32	R			615	50.800 ($\frac{2}{1}$)	31.750 ($\frac{1}{2}$)	22.225 ($\frac{7}{8}$)	$\frac{1}{4}$ -14	25.400 ($\frac{1}{1}$)
Boundary dimensions mm(inch)										
B max	B ₂	B ₃	C ₁	S ₁	S ₂	F	Bearing dimension f Min. mm(inch)	Maximum tightening torque C	Basic dynamic load rating C ₀	Basic static load rating C ₀
33.5 (1.32)	50.800 ($\frac{2}{1}$)	12.700 ($\frac{1}{2}$)	0.794 ($\frac{1}{8}$)	4.762 ($\frac{3}{8}$)	4.762 ($\frac{3}{8}$)	1.588 ($\frac{1}{8}$)	37.506 (1.5)	192	32 500	69 900

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463036
Inside diameter	22.225 mm
Outside diameter	50.8 mm
Thickness	31.75 mm
Weight	615 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE