


Cam follower CR20-VBUUR-IKO - CR20-VBUUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr20-vbuur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers **With Cage/With Screwdriver Slot**

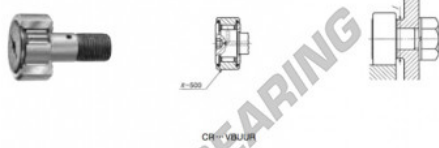

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	
	Shield type With cover outer ring	Shield type With cylindrical outer ring	Spigot type With groove outer ring	Spigot type With cylindrical outer ring							
12.700 ($\frac{1}{2}$)			CR 20	VBUUR	137	31.750 ($\frac{1}{2}$)	19.050 ($\frac{3}{4}$)	12.700 ($\frac{1}{2}$)	$\frac{1}{4}$ -20	15.875 ($\frac{5}{8}$)	
Boundary dimensions mm (inch)						Mounting dimension f Min. mm (inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N		
B max	B ₂	B ₃	C ₁	g ₁	g ₂					H	r
20.4 (0.80)	31.750 ($\frac{1}{2}$)	7.938 ($\frac{5}{16}$)	0.794 ($\frac{1}{16}$)	4.792 ($\frac{3}{4}$)	3.175 ($\frac{1}{4}$)	6.350 ($\frac{1}{4}$)	1.588 ($\frac{1}{8}$)	21.828 ($\frac{7}{8}$)	27.7	23 600	31 700

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463760
Inside diameter	12.7 mm
Outside diameter	31.75 mm
Thickness	19.05 mm
Weight	137 g
Packaging	-

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE