


Cam follower CR22-VBR-IKO - CR22-VBR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr22-vbr-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

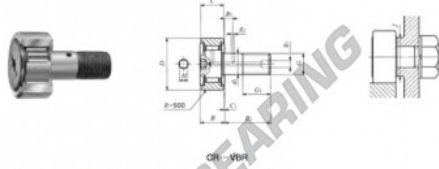

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	
	Shield type With cover outer ring	Shield type With cylindrical outer ring	Sleeve type With cylindrical outer ring	Sleeve type With cylindrical outer ring							
12.700 ($\frac{1}{2}$)	CR 22	VBR			160	34.925 ($\frac{1}{2}$)	19.050 ($\frac{3}{4}$)	12.700 ($\frac{1}{2}$)	$\frac{1}{4}$ -20	15.875 ($\frac{5}{8}$)	
Boundary dimensions mm(inch)						Mounting dimension f Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N		
B max	B ₂	B ₃	C ₁	g ₁	g ₂					H	r
20.4 (0.80)	31.750 ($\frac{1}{2}$)	7.938 ($\frac{5}{16}$)	0.794 ($\frac{1}{16}$)	4.792 ($\frac{3}{16}$)	3.175 ($\frac{1}{8}$)	6.350 ($\frac{1}{4}$)	1.588 ($\frac{1}{16}$)	21.828 ($\frac{7}{8}$)	27.7	23 600	31 700

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463821
Inside diameter	12.7 mm
Outside diameter	34.925 mm
Thickness	19.05 mm
Weight	160 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE