


Cam follower CR36-VBR-IKO - CR36-VBR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr36-vbr-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

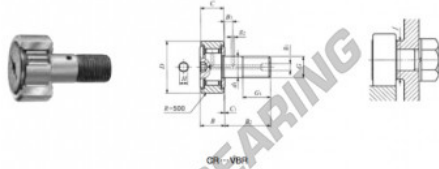

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	
	Shield type With cover outer ring	Shield type With cylindrical outer ring	Shield type With cylindrical outer ring	Shield type With cylindrical outer ring							
22.225 ($\frac{7}{8}$)	CR 36	VBR			759	57.150 (2)	31.750 (1)	22.225 (7)	7/14	25.400 (1)	
Boundary dimensions mm(inch)						Mounting dimension f Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N		
B max	B ₂	B ₃	C ₁	g ₁	g ₂					H	r
33.5 (1.32)	50.800 (2)	12.700 (7)	0.794 (3)	4.762 (3)	4.762 (3)	11.112 (3)	1.588 (3)	37.305 (1)	162	45 700	80 600

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464293
Inside diameter	22.225 mm
Outside diameter	57.15 mm
Thickness	31.75 mm
Weight	759 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE