


Cam follower CRH16-V-IKO - CRH16-V-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/crh16-v-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

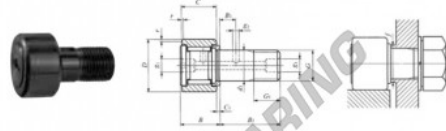

Identification number		Mass (Ref.)								
Stud dia. mm (inch)	Shield type	Sealed type	B_2	D	C	d_1	G LINE	G_1	B max	
15.875 ($\frac{5}{8}$)	CRH 16 V		25.400 ($1 \frac{1}{8}$)	15.875 ($\frac{5}{8}$)	15.875 ($\frac{5}{8}$)	$\frac{1}{8}$	12.700 ($\frac{1}{2}$)	17.913 ($\frac{7}{8}$)		
Boundary dimensions mm (inch)										
B_2	B_3	C_1	g_1	g_2	r	Bearing dimension f Min. mm (inch)	Maximum operating temp. C N-m	Basic static load rating C_0 N	Basic dynamic load rating C_g N	
25.400 ($1 \frac{1}{8}$)	6.350 ($\frac{1}{4}$)	1.588 ($\frac{1}{16}$)	4.762 ($\frac{3}{16}$)	2.381 ($\frac{1}{8}$)	1.191 ($\frac{1}{16}$)	18.256 ($\frac{3}{4}$)	57.8	13 100	22 700	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464507
Inside diameter	15.875 mm
Outside diameter	25.4 mm
Thickness	15.875 mm
Weight	93 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE