SI Rod end
SIL50-ES-DURBAL - SIL50-ES-DURBAL

https://www.123bearing.eu/bearing-housing/rod-end/si/sil50-es-durbal

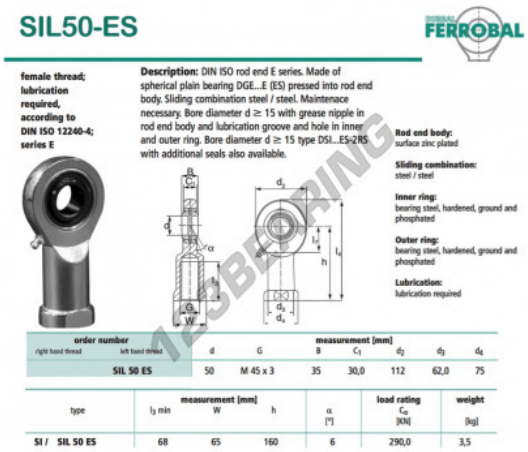

SIL50-ES

FERROBAL

female thread; lubrication required, according to DIN ISO 12240-4; series E

Description: DIN ISO rod end E series. Made of spherical plain bearing DGE...E (ES) pressed into rod end body. Sliding combination steel / steel. Maintenace necessary. Bore diameter d ≥ 15 with grease nipple in rod end body and lubrication groove and hole in inner and outer ring. Bore diameter d ≥ 15 type DSI...ES-2RS with additional seals also available.

Rod end body: surface zinc plated

Sliding combination: steel / steel

Inner ring: bearing steel, hardened, ground and phosphated

Outer ring: bearing steel, hardened, ground and phosphated

Lubrication: lubrication required

order number (right hand thread / left hand thread)	d	G	B	C_1	d_2	d_3	d_4
SIL 50 ES	50	M 45 x 3	35	30,0	112	62,0	75

type	l_3 min	W	h	α [°]	load rating C_0 [KN]	weight [kg]
SI / SIL 50 ES	68	65	160	6	290,0	3,5

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952497587
Inside diameter	50 mm
Inside diameter	1.969" inch
Outside diameter	112 mm
Outside diameter	4.409" inch
Thickness	35 mm
Thickness	1.378" inch
Type	SI
Weight	3500 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.eu
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE