SI Rod end
SIL60-ES-2RS-DURBAL - SIL60-ES-2RS-DURBAL

https://www.123bearing.eu/bearing-housing/rod-end/si/sil60-es-2rs-durbal

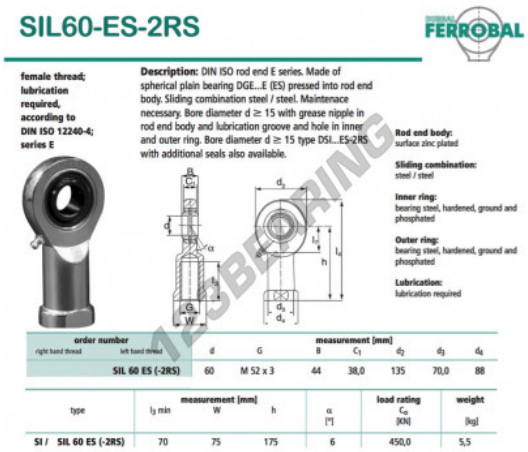

SIL60-ES-2RS

FERROBAL

female thread; lubrication required, according to DIN ISO 12240-4; series E

Description: DIN ISO rod end E series. Made of spherical plain bearing DGE...E (ES) pressed into rod end body. Sliding combination steel / steel. Maintenace necessary. Bore diameter d ≥ 15 with grease nipple in rod end body and lubrication groove and hole in inner and outer ring. Bore diameter d ≥ 15 type DSI...ES-2RS with additional seals also available.

Rod end body: surface zinc plated

Sliding combination: steel / steel

Inner ring: bearing steel, hardened, ground and phosphated

Outer ring: bearing steel, hardened, ground and phosphated

Lubrication: lubrication required

order number (right hand thread / left hand thread)	d	G	measurement [mm] B	C_1	d_2	d_3	d_4
SIL 60 ES (-2RS)	60	M 52 x 3	44	38,0	135	70,0	88

type	measurement [mm] l_3 min	W	h	α [°]	load rating C_0 [KN]	weight [kg]
SI / SIL 60 ES (-2RS)	70	75	175	6	450,0	5,5

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952497624
Inside diameter	60 mm
Inside diameter	2.362" inch
Outside diameter	135 mm
Outside diameter	5.315" inch
Thickness	44 mm
Thickness	1.732" inch
Type	SI
Weight	5500 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.eu
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE