


TAPR Rod end GIHR-K40-DO-DURBAL - GIHR-K40-DO-DURBAL

<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihr-k40-do-durbal>

GIHR-K40-DO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

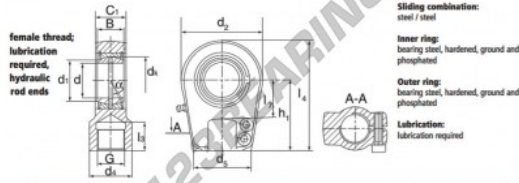

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and phosphated

Outer ring:
bearing steel, hardened, ground and phosphated

Lubrication:
lubrication required

order number	d	d ₁	G	d ₂	B	C	d ₃
GIHR-K 40 DO	40	45,0	M 35 x 1,5	49	76	28	35

type	l ₁ min	l ₂ min	h	l	d ₄	α [°]	load rating C ₀ [N]	weight [kg]
GIHR-K / GIHL-K 40 DO	36	45	85	135,0	53,0	7	250	2,00

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499147
Inside diameter	40 mm
Outside diameter	94 mm
Thickness	35 mm
Type	TAPR
Weight	2000 g
Thread	Right-hand thread
Lubrication	with
Packaging	1
Standard	No standard

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE