

## TAPR Rod end GIHN-K-16LO-DURBAL - GIHN-K-16LO-DURBAL


<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihn-k-16lo-durbal>

### GIHN-K-16LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

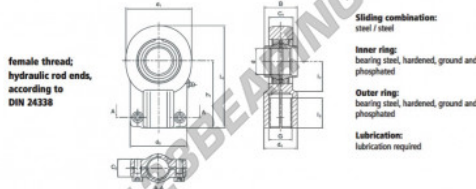

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 16 LO	16	40	M 14 x 1,5	21,0	40	16	14 14

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
GIHN-K / GIHN-KL 16 LO	19	44	64,0	18	36,5 [kN]	0,20 [kg]

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500072
Inside diameter	16 mm
Outside diameter	40 mm
Thickness	14 mm
Type	TAPR
Weight	200 g
Thread	Right-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE