

TAPR Rod end GIHN-KL-25LO-DURBAL - GIHN-KL-25LO-DURBAL


<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihn-kl-25lo-durbal>

GIHN-KL-25LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

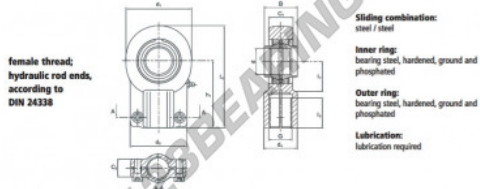

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
right hand thread								
left hand thread								
GIHN-KL 25 LO	25	58	M 20 x 1,5	30,0	54	25	22	19

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
					C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 25 LO	29	65	96,0	27	78,0	0,66

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500140
Inside diameter	25 mm
Outside diameter	58 mm
Thickness	22 mm
Type	TAPR
Weight	660 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE