

TAPR Rod end GIHN-KL-125LO-DURBAL - GIHN-KL-125LO-DURBAL


<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihn-kl-125lo-durbal>

GIHN-KL-125LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

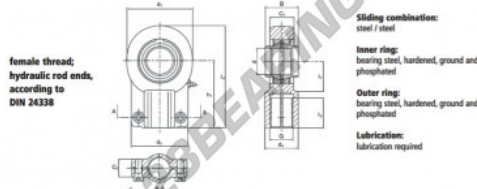

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
right hand thread								
left hand thread								
GIHN-KL 125 LO	125	260	M100 x 3	135,0	200	125	102	72

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
		h ₁	l ₂	l ₃	C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 125 LO	113	260	405,0	120	1430,0	43,00

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500560
Inside diameter	125 mm
Outside diameter	260 mm
Thickness	102 mm
Type	TAPR
Weight	43000 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE