


Drawn cup roller bearing TAM1012-IKO - TAM1012-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/tam1012-iko>

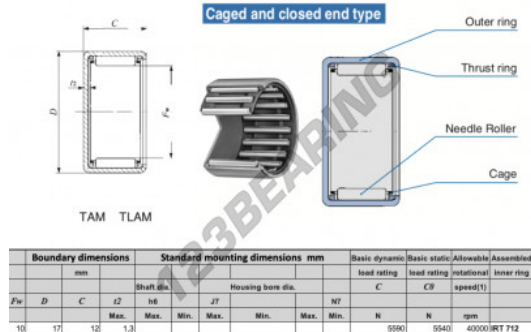

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic		Basic static		Allowable	Assembled
mm			mm						load rating	load rating	rotational	inner ring		
F_w	D	C	r_2	r_6	J_7	Housing bore dia.			N_7	C_7	speed(1)			
			Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm		
10	17	12	1.3							5590	5540	40000	RT 712	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060598783
Inside diameter	10 mm
Inside diameter	0.394" inch
Outside diameter	17 mm
Outside diameter	0.669" inch
Thickness	12 mm
Thickness	0.472" inch
Limiting speed	40000 rpm
Dynamic load	55.9 kN
Static load	55.4 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE