


## Drawn cup roller bearing TLAM1416-IKO - TLAM1416-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/tlam1416-iko>

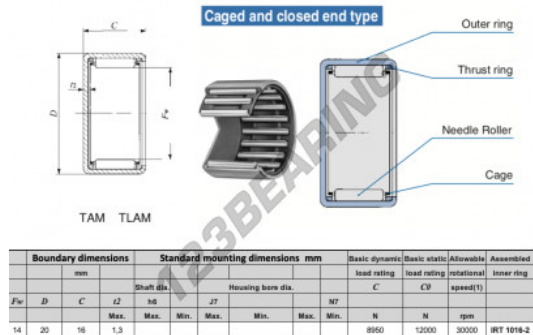

Boundary dimensions			Standard mounting dimensions mm					Basic dynamic	Basic static	Allowable	Assembled	
mm			mm					load rating	load rating	rotational	inner ring	
$F_w$	$D$	$C$	Shaft dia.		Housing bore dia.			$N_7$	$C$	$C/P$	speed(1)	
			z2	h6	J7	Min.	Max.	Min.	N	N	rpm	
			Max.	Max.	Min.	Max.	Min.	Max.	N	N	rpm	
14	20	16	1.3						8950	12000	30000	IRT 1016-2

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060598837
Inside diameter	14 mm
Outside diameter	20 mm
Thickness	16 mm
Limiting speed	30000 rpm
Dynamic load	8 kN
Static load	12 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE