


Drawn cup roller bearing TAM5040-IKO - TAM5040-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/tam5040-iko>

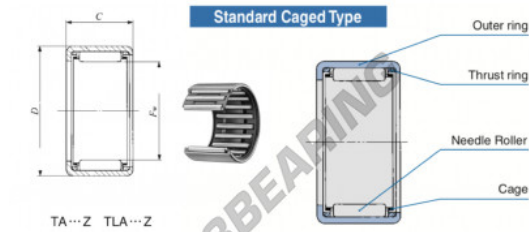

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(T)		Assembled inner ring	
mm		Shaft dia.		Housing bore dia.				C'		C''		N		rpm	
Pw	D	C	B	h6	H7	k7	k8	NT	C'	C''	N	N	rpm	rpm	rpm
50	62	40	3.4	Max.	Min.	Max.	Min.	Max.	Min.	Max.	7650	15700	6500	RT 4640	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599858
Inside diameter	50 mm
Outside diameter	62 mm
Thickness	40 mm
Limiting speed	6500 rpm
Dynamic load	76.5 kN
Static load	157 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE