


Drawn cup roller bearing TAMW5545-IKO - TAMW5545-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/tamw5545-iko>

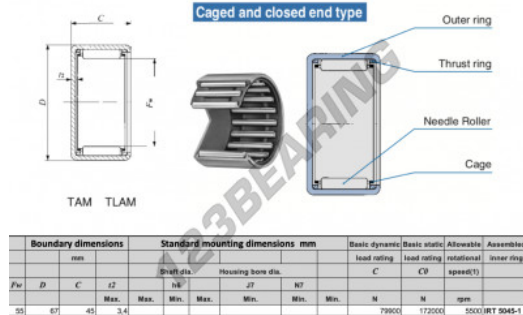

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed		Assembled inner ring	
mm			mm						C		CV		rpm			
Pw	D	C	Shaft dia.		Housing bore dia.											
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
55	67	45	55	67	55	67	55	67	79.9	172	5500	172000	5500	172000	5500	172000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599919
Inside diameter	55 mm
Outside diameter	67 mm
Thickness	45 mm
Limiting speed	5500 rpm
Dynamic load	79.9 kN
Static load	172 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE