


## Drawn cup roller bearing BHAM1610-IKO - BHAM1610-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/bham1610-iko>

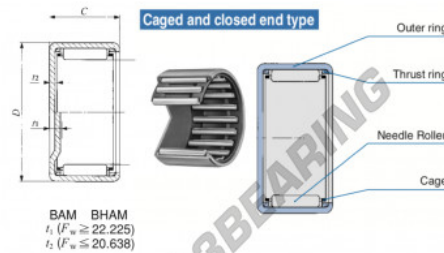

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	
$F_w$	$D$	$C$	$r_1$	$r_2$	$r_3$	$r_4$	$C$	$C_0$	$a_{d1}$	$a_{d2}$	$a_{d3}$	$a_{d4}$
21.600 (1)	33.338 (1 1/4)	15.881 (625)	3.4						15300	22100	15000	—

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600431
Inside diameter	25.4 mm
Outside diameter	33.338 mm
Thickness	15.88 mm
Limiting speed	15000 rpm
Dynamic load	15.3 kN
Static load	22.1 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE