


Drawn cup roller bearing BHAM1820-IKO - BHAM1820-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/bham1820-iko>

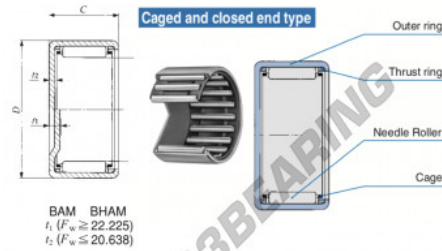

Boundary dimensions mm(inch)		Standard mounting dimensions mm		Basic dynamic load rating	Basic static load rating	Abbr. ISO 4287	Abbr. ISO 4288
f_1	f_2	Shaft dia.	Housing bore dia.	C	CP	mm(kN)	mm(kN)
Min.	Max.	Min.	Max.	Min.	Max.	rpm	
28.875 (1.136)	38.100 (1.500)	31.752 (2.005)	3.4			37100	61100

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600516
Inside diameter	28.575 mm
Inside diameter	1 1/8" inch
Outside diameter	38.1 mm
Outside diameter	1 1/2" inch
Thickness	31.75 mm
Thickness	1 1/4" inch
Limiting speed	13000 rpm
Dynamic load	37.1 kN
Static load	61.1 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE