


Drawn cup roller bearing BAM4416-IKO - BAM4416-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/bam4416-iko>

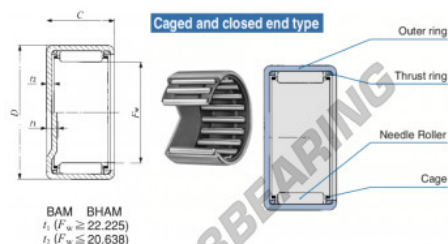

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dimensions lead-riding		Basic clark lead-riding		Advance rotational		Assemble inter clark	
			Shaft dia		Housing bore dia		C	CP			speed(U)			
For	D	C	f	Id		fl								
			Max	Min		Max	Min	A	B	mm				
60.660 (2.400)	26.413 (1.036)	28.401 (1.118)	62.867	60.833		63.333 (2.500)	61.900	11.900	10.630	10.000	10.000	10.000	10.000	