


## Drawn cup roller bearing BA167-Z-IKO - BA167-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba167-z-iko>

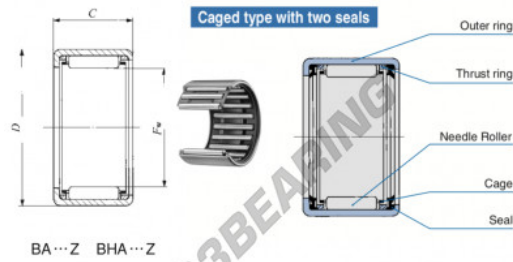

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
<i>P</i>	<i>D</i>	<i>C</i>	<i>c2</i>	Shaft dia. <i>t6</i>	Housing bore dia. <i>J7</i>		load rating	load rating	rotational	inner ring
			Max.	Max.	Min.	Max.	Min.	N	N	rpm
25.400	31.750	11.130	2.5					7720	11100	15000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601155
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	11.13 mm
Limiting speed	15000 rpm
Dynamic load	7.72 kN
Static load	11.1 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE