


## Drawn cup roller bearing BA168-Z-IKO - BA168-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba168-z-iko>

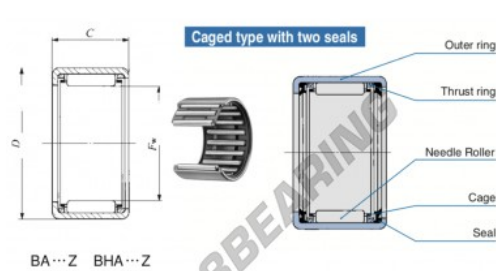

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring	
$P_{w1}$	$D$	$E$	$e2$	$b4$	$JT$	$C$	$C'P$				
			Max.	Min.	Max.	Min.	N	N	rpm		
28.400	(1.11790)	11.41	12.700	.500	2.8			6240	12000	15000	IRB

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601162
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	12.7 mm
Limiting speed	15000 rpm
Dynamic load	8.24 kN
Static load	12000 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE