


Drawn cup roller bearing BA1610-Z-IKO - BA1610-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1610-z-iko>

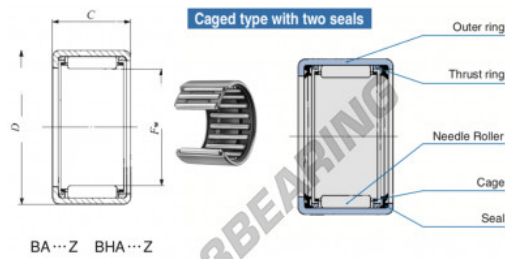

BA...Z BHA...Z

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
F_w	D	C	r_2	h_6	Housing bore dia.	J_1	load rating	load rating	rotational	inner ring
			Max.	Max.	Max.	Min.	K	K_0	speed(S)	
15-40	15.88	31.75	0.114	15.88	625	2.6				
							11300	18100	15000	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601179
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	15.88 mm
Limiting speed	15000 rpm
Dynamic load	11.3 kN
Static load	18.1 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE