


Drawn cup roller bearing BA1612-Z-IKO - BA1612-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1612-z-iko>

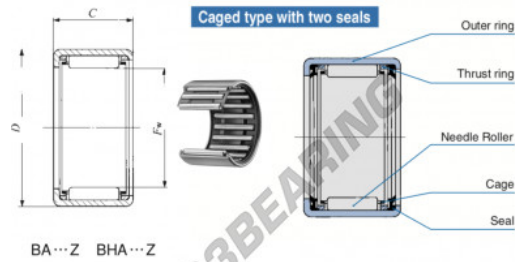

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>G</i>	<i>b₆</i>	<i>J₇</i>	<i>C</i>	<i>C₉</i>	rpm		
25.400 (1.0118)	31.750 (1.2496)	19.050 (0.7500)	2.8	Max.	Min.	Max.	Min.	14200	24300	15000 (RB 1212)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601186
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	19.05 mm
Limiting speed	15000 rpm
Dynamic load	14.2 kN
Static load	24.3 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE