


Drawn cup roller bearing BA2610-Z-IKO - BA2610-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba2610-z-iko>

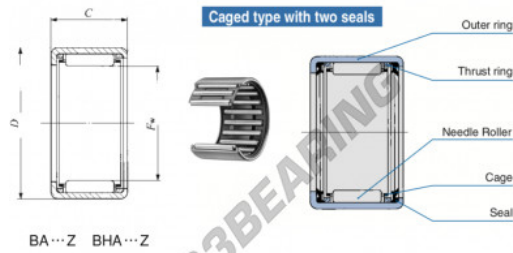

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ¹⁾	Assembled inner ring
<i>P₀</i>	<i>D</i>	<i>C</i>	<i>l₂</i>	<i>h₂</i>	Housing bore dia. <i>J₇</i>	<i>C</i>	<i>C₀</i>	rpm	
41.275 (1 5/8)	50.800 (2)	15.88 (5/8)	2.6			N	N	8000	JB Z218

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601490
Inside diameter	41.275 mm
Outside diameter	50.8 mm
Thickness	15.88 mm
Limiting speed	8000 rpm
Dynamic load	18.9 kN
Static load	30 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE