


Drawn cup roller bearing BA3010-Z-IKO - BA3010-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba3010-z-iko>

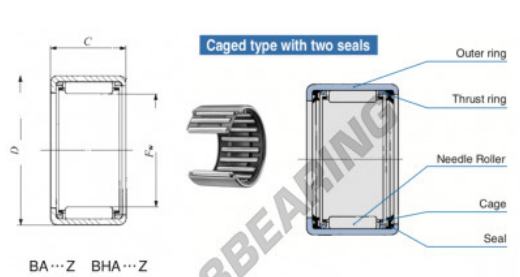

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_2	d_1	Housing bore dia.	C	C ₀	rpm	
47.625 (1.8 7/8)	57.150 (2 1/4)	15.880 (.625)	46	46	Min. Max.	Min. Max.	N	N	7000
									RB 2419-1

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601551
Inside diameter	47.625 mm
Outside diameter	57.15 mm
Thickness	15.88 mm
Limiting speed	7000 rpm
Dynamic load	20.3 kN
Static load	34.5 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE