


Drawn cup roller bearing BA3220-Z-IKO - BA3220-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba3220-z-iko>

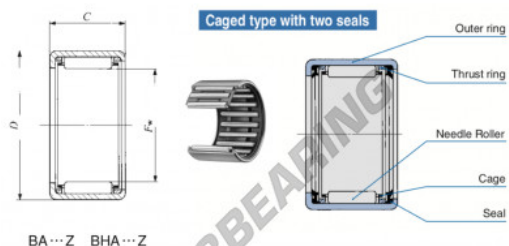

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d	H	J	C'	C_0			
50.800 (2)	60.325 (2 #8)	31.75 (1.250)	2.8							
			Max.	Max.	Min.	Max.	Min.	N	N	
								rpm	RB 2720	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601599
Inside diameter	50.8 mm
Outside diameter	60.325 mm
Thickness	31.75 mm
Limiting speed	6000 rpm
Weight	128 g
Dynamic load	46.6 kN
Static load	102 kN
Packaging	-
Standard	No standard

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE