


Drawn cup roller bearing BA4216-Z-IKO - BA4216-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba4216-z-iko>

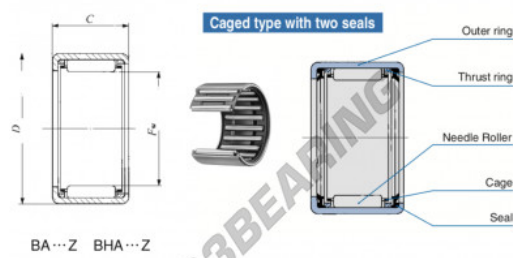

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled	
<i>F_w</i>	<i>D</i>	<i>C</i>	Shaft dia.		Housing bore dia.		load rating	load rating	rotational	inner ring	
			<i>d</i>	<i>h₆</i>	<i>H₇</i>	<i>h₇</i>	<i>C</i>	<i>C₀</i>	speed(s)		
			Max.	Max.	Min.	Max.	Min.	N	N	rpm	
66.675 (2 5/8)	76.200 (3)	25.400 (1.000)	2.0	66.675	66.425	75.210	75.180	42000	97900	4000	MB 3616

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601643
Inside diameter	66.675 mm
Outside diameter	76.2 mm
Thickness	25.4 mm
Limiting speed	4000 rpm
Dynamic load	42 kN
Static load	97.9 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE