


## Drawn cup roller bearing BA56-Z-IKO - BA56-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba56-z-iko>

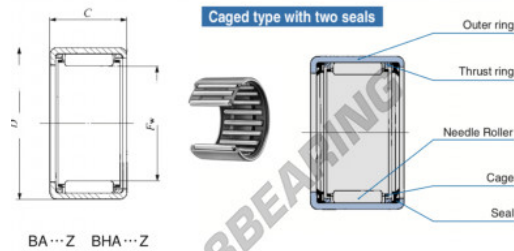

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
$F_w$	$D$	$C$	$d7$	$h6$	$d7$	$d7$	$C$	$C0$	rpm	
			Max.	Min.	Max.	Min.	N	N		
7.938 (1/4)	12.700 (1/2)	9.52 (3/8)	1				2620	2390	45000	—

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601728
Inside diameter	7.938 mm
Outside diameter	12.7 mm
Thickness	9.52 mm
Limiting speed	45000 rpm
Dynamic load	2.62 kN
Static load	2.39 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE