


Drawn cup roller bearing BA65-Z-IKO - BA65-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba65-z-iko>

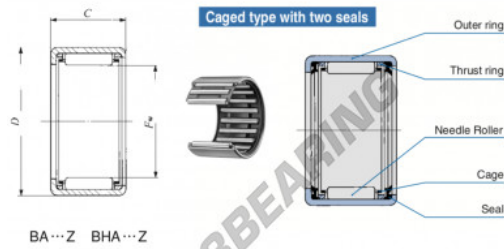

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed ⁽¹⁾	Assembled inner ring
<i>F_{in}</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h_a</i>	<i>JT</i>	<i>C</i>	<i>C₁₀</i>			
	Max.	Max.	Min.	Max.	Min.	N	N	rpm		
0.525 (H 8)	14.288 (F6)	7.92(312)	1				2200	2070	40000	--

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601759
Inside diameter	9.525 mm
Inside diameter	3/8" inch
Outside diameter	14.288 mm
Outside diameter	9/16" inch
Thickness	7.92 mm
Thickness	0.312" inch
Limiting speed	40000 rpm
Dynamic load	2.22 kN
Static load	2.01 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE