


Drawn cup roller bearing BA66-Z-IKO - BA66-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba66-z-iko>

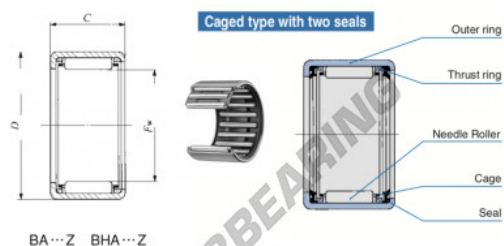

Boundary dimensions mm(inch)				Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	B	Shaft dia.	Housing bore dia.	P	P_2	C	C_0	rpm	
Max.	Max.	Min.	Min.	Max.	Min.	Max.	Min.	N	N		
9.525 (0.375)	14.288 (0.562)	9.52 (0.375)	1					3000	3000	40000	---

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601766
Inside diameter	9.525 mm
Outside diameter	14.288 mm
Thickness	9.52 mm
Limiting speed	40000 rpm
Dynamic load	3.09 kN
Static load	3.08 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE